


TSG416 Alternator Update			
Description	Size	Qty	Part #
Alternator	14 V, 100 AMP	1	Marelli 12100MM; 5330010
Belt	1090mm	1	Dayco 5060430
Top Mounting Bolt	M8x1.25x95mm	1	F11113690
Bottom Mounting Bolt	M8x1.25x45mm	2	F0121807
Alt. Mounting Spacer	8mm ID, ~20mm OD, 3.25mm thick	2	2030010 => 0159641
I-Ring for Excite Wire	5.29mm ID, 18 gauge wire	1	NA
Heat Shrink (excite I-Ring, Cap Off Red)	2" Length; 18 gauge wire	2	NA

Installation Notes:

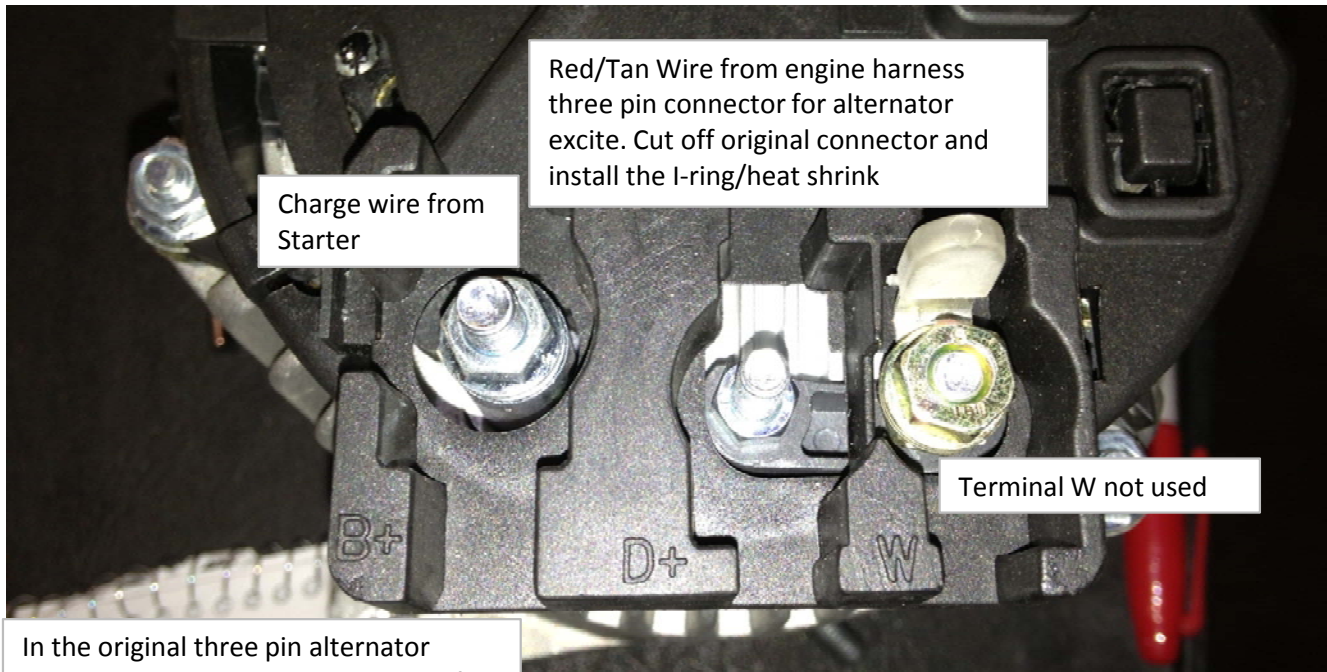

Charge wire from Starter

Red/Tan Wire from engine harness three pin connector for alternator excite. Cut off original connector and install the I-ring/heat shrink

Terminal W not used

In the original three pin alternator connector there will be a red wire left over. Cut this wire back and seal with heat shrink.